



**KILNS BUILT TO LAST**

L&L Kiln Mfg Inc. ♦ 505 Sharptown Road ♦ Swedesboro, NJ 08085

Phone: (856) 294.0077 ♦ Fax: (856) 294.0070 ♦ Email:sales@hotkilns.com ♦ Web:www.hotkilns.com

## OPTIONS FOR LIBERTY-BELLE KILNS

### 2-1/2" BRICK

3" brick is standard on the Liberty-Belle.

Subtract \$50 from the list price of the Liberty-Belle for 2-1/2" brick.

Note: the 240 volt LB18-3 (the standard configuration of the Liberty-Belle) heated up to 2350 Deg F in 2 hours when the kiln was empty. The LB18-240 (with 2-1/2" brick) heated up to 2350 Deg F in 2-1/2 hours.

No change in delivery for this option.

### DIFFERENT VOLTAGES

208 volt elements are available at no extra charge. 220 volts is available for non-US applications. 3 phase is not available.

### DIFFERENT CORDS AND PLUGS

MODEL NUMBER	VOLTS	WATTS	AMPS	FUSE SIZE	WIRE SIZE	CONE RATING
LB18-208 or LB-3-208	208/1 Ph	4,980	23.9	30 amps	10 ga	Cone 10
LB18-220 or LB-3-220	220/1 Ph	5,267	23.9	30 amps	10 ga	Cone 10

### ALL CORDS ARE 12 FEET LONG


**The standard plug that comes with the kiln is a Nema 14-30P (4 prong, 30 amp).**

This plug can be easily altered by the customer (by changing an included prong) to be a 14-50P (4 prong, 50 amp) plug. This is already included for no extra charge.

### THE FOLLOWING PLUGS ARE AVAILABLE FOR A \$50 NET CHARGE (No Discounts)

- 1) Nema 6-30 plug (3 prong, 50 amp): Part Number L-P-630X/00
- 2) Nema 15-50 plug (4 prong, 50 amp, we don't use the Neutral): Part Number L-P-1550/00
- 3) Nema 6-50 plug (3 prong, 50 amp): Part Number L-P-650X/00
- 4) Nema 10-30 plug (4 prong, 30 amp, we don't use the Neutral): Part Number L-P-1030/00
- 5) Nema 10-50 plug (4 prong, 50 amp, we don't use the Neutral): Part Number L-P-1050/00

Note that it is very easy to change plugs in the field if necessary and plugs are usually easy to purchase locally.

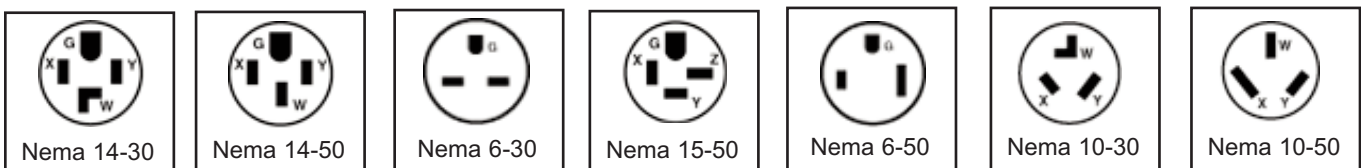

STANDARD

INCLUDED