
- 1. WALL/KILN SPACING: 12" [30.5cm] SPACING BETWEEN SIDES OF KILN AND WALLS OR OTHER OBJECTS. 18" [45.7cm] IS RECOMMENDED. LEAVE AT LEAST 18" [45.7cm] BETWEEN TWO KILNS.
- 2. AMBIENT VENTILATION: SEE CHART TO RIGHT FOR RATINGS. TO CALCULATE REQUIREMENTS, SEE hotkilns.com/calculate-kiln-room-ventilation.
- 3. KILN VENTILATION: L&L VENT-SURE KILN VENT RECOMMENDED FOR SAFETY AND LONGER ELEMENT LIFE. OPTIONAL CONTROL ALLOWS VENT TO BE TURNED ON AND OFF WITH CONTROL.
- **OTHER INFO: REFER TO INSTALLATION INSTRUCTIONS AND** CAUTIONS INSTRUCTIONS FOR OTHER REQUIREMENTS AND SAFETY INFORMATION. REFER TO WIRING DIAGRAM FOR ELECTRICAL HOOKUP INFORMATION.
- MAX LOAD WEIGHT: SEE hotkilns.com/load-weight. 5.
- WEIGHT OF KILN: 165 LBS, 75 KG


BTUS/ KILOJOULES PER HOUR NEEDED TO BE VENTED WITH AMBIENT ROOM VENTILATION (THIS IS IN ADDITION TO KILN VENTING):

AT TEMP F	BTUS	AT TEMP C	KILOJOULES
1800F	7778	980C	8206
2000F	9094	1095C	9595
2232F	10739	1222C	11330
2350F	11624	1285C	12264

**POWER CORD IS 6 FEET** LONG: NEMA 6-50 FOR SINGLE PHASE OR 15-50 FOR THREE PHASE. ALTERNATELY KILN MAY BE HARD WIRED TO A **FUSED DISCONNECT** BOX. ALSO 6-30 AND 10-30 CORDS ARE **AVAILABLE AS AN** OPTION.

15.5" [39.3cm] KILN FURNITURE (OPTIONAL)

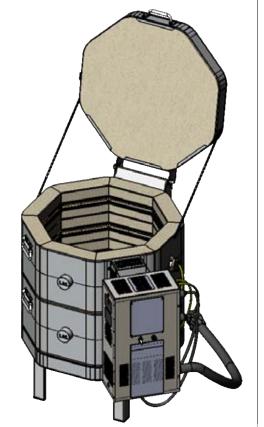

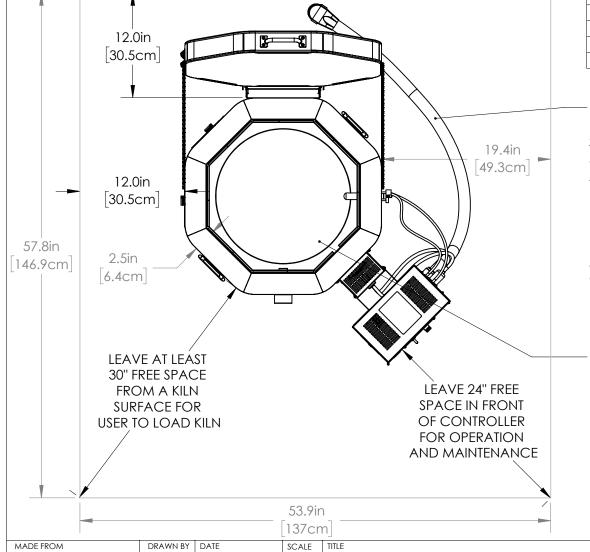

**NEW** 

505 SHARPTOWN RD REV SHEET OF

DRAWING NO. 1/3 235-000-25-2

